




**TEST REPORT: LARGE BUS
CONSTRUCTION**
Directive 2001/85/EC
Regulation 107.02 up to and including
Supplement 5 ECE Regulation 107.03

Paragraph	Requirement	Complies (Yes, No, N/A)
-----------	-------------	----------------------------

REPORT/JOB NUMBER:	VSM245840
---------------------------	------------------

TEST DETAILS	
Location of Test	VCA Midland Centre, Watling Street, Nuneaton, CV10 OUA, United Kingdom
Date of Test	29 November 2011
VCA Representative(s)	Richard Pegg
Manufacturer's Representative(s)	Stuart Taylor
Reason for Test	Test report to ensure compliance with Paragraph 7.6.10.9 of EC Directive 2001/85/EEC or 7.6.10.9 of Regulation 107.02 / 107.03

MANUFACTURER DETAILS	
Manufacturer's Name	WSH Taylor Engineering T/A Stayco
Manufacturer's Address	Unit 36-39 Radway Industrial Park Radway Green, Crewe Cheshire CW2 5PR, United Kingdom
Model Type & description	W "Cassette Step"
Category	Separate Technical Unit

CONCLUSION	
The above mentioned STU was tested in accordance with Paragraph 7.6.10.9 of Directive 2001/85/EC and ECE Regulation 107.03 and was found to comply in all respects	
Signature:	
Name:	Richard Pegg
Position:	Type Approval Engineer
Date:	29 November 2011

LIST OF ANNES		
ANN	No of PAGES	SUBJECT
1		
2		
3		
4		



**TEST REPORT: LARGE BUS
CONSTRUCTION**
Directive 2001/85/EC
Regulation 107.02 up to and including
Supplement 5 ECE Regulation 107.03

Paragraph	Requirement	Complies (Yes, No, N/A)
-----------	-------------	----------------------------

TEST SPECIFICATION AND WORST CASE RATIONALE
 WM600 Single Manual step Mounted as a separate Technical unit to a test rig by means of four M6 fastenings at the front of the step and two M8 fasteners to the rear of the step.
 The test involved pressing the step via a calibrated load cell with a 100mm diameter disc at the centre of the extended step at a force of 136 kgs and measuring the deflection
 Additional models this test will cover: WE600, WM450 and WE450
 The WE600 has the same construction but does not have the manual lock out system on it which will reduce the deflection by around 5mm. The WM450 and WE450 are of the same construction as the WM600 and WE600 but are less wide and hence are stiffer.

Tests required (if more than one is applicable)
 • **Deflection test**

MANUFACTURER'S DOCUMENTATION

Manufacturer's documentation is complete and reflects the agreed specification for the component tested and covers all variants and versions agreed in the worse case rationale

FACILITY AND EQUIPMENT CHECKS

- 1 Generic Risk assessment followed *Insert RA identifier here*
- OR
Specific Risk assessment completed and stored in electronic job folder
- 2 Facilities and test equipment are appropriate
Brief description of test equipment:
- 3 Calibration certificates checked and valid, recorded in the following table

Equipment	Serial No.	Calibration data
Load Cell/ Data reader	165096/1075184	19/10/2011
Measure		Confirmed zero at start



**TEST REPORT: LARGE BUS
CONSTRUCTION**
Directive 2001/85/EC
Regulation 107.02 up to and including
Supplement 5 ECE Regulation 107.03

Paragraph	Requirement	Complies (Yes, No, N/A)
-----------	-------------	----------------------------

TEST REQUIREMENTS

Regulation	Directive
------------	-----------

*Ann 3
7.6.10*


Ann I 7.6.10

TECHNICAL REQUIREMENTS FOR RETRACTABLE STEPS

<i>Ann 3 7.6.10.9</i>	<i>Ann I 7.6.10.9</i>		
		When the passenger door is open, the retractable step shall be securely held in the extended position. When a mass of 136 kg is placed in the centre of a single step or a mass of 272 kg is placed in the centre of a double step the deflection at any point on the step, measured relative to the body of vehicle, shall not exceed 10 mm.	

Results: 8.0 mm deflection noted at 136 kgs load

Photographs:

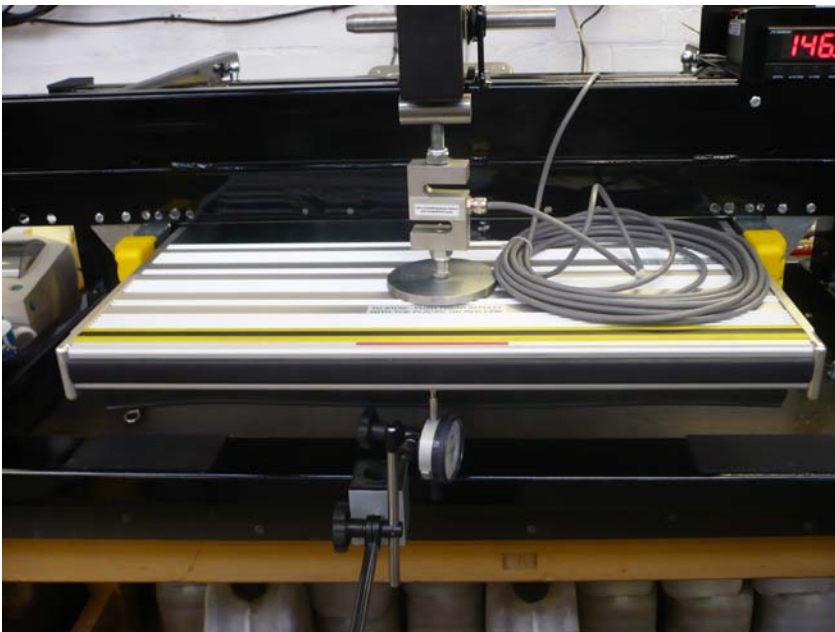



**TEST REPORT: LARGE BUS
CONSTRUCTION**
Directive 2001/85/EC
Regulation 107.02 up to and including
Supplement 5 ECE Regulation 107.03

Paragraph	Requirement	Complies (Yes, No, N/A)
-----------	-------------	----------------------------

