




## ZE600 ELECTRIC FRAME STEP

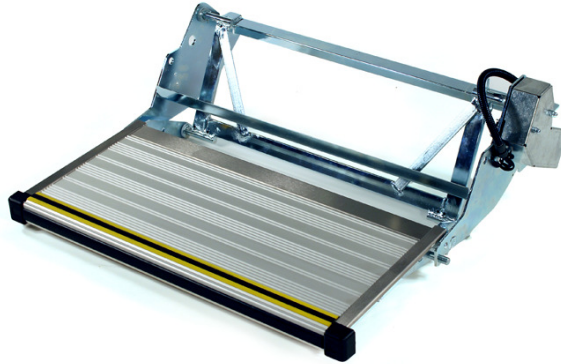

### Step operation:

The ZE600 electric frame step is powered by a robust all metal geared Stayco electric motor fitted with magnetic limit switches for improved tolerance to dirt and cold. There is a removable drive pin that disengages the drive to the motor in the event of a power failure while the step is deployed. The tread can then be stowed by hand to allow the vehicle to get home.

### Dimensions:

Tread size deployed	300mm x 620mm
Tread deployment movement	248mm
Minimum projection of frame below sill height	54mm
Frame depth behind sill lip	335mm
Maximum tread projection out from sill lip	90mm
Overall width of frame and motor cover	710mm

Weight: 12kgs

Standard Equipment:

- Extruded Anodised Aluminium ribbed tread profile
- High grip Yellow and Black Rubber Strip to tread top edge
- Soft Rubber Cushion Strip to leading edge of tread
- Nylon corner mouldings
- Stainless steel tread edge trim and tread depth extension
- BZP Steel Frame
- Nylon pivot bearings
- Galvanised Steel Motor Cover
- Stayco 12v all metal geared electric motor unit
- Wire harness
- Control unit
- Dash switch
- Dash warning light

Options:

- Vehicle Mounting Kits for suitable vehicles
- 24v motor

Warranty: 12 months on site

Complies with all current legislative requirements. CE marked.

The Company has a policy of continual improvement and reserves the right to change the product specifications without notice