


stayco^o WE600 ELECTRIC CASSETTE STEP

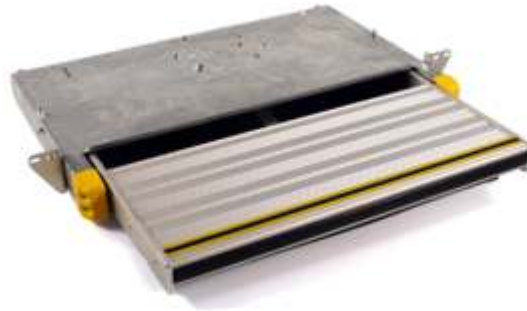

Step operation:

The WE600 electric cassette step is powered by a Stayco all metal geared electric motor with a single arm activation link to the tread. In the event of a power failure when the step is deployed, the tread can be disconnected easily from the motor link arm and then manually closed.

Dimensions:

| | |
|--|---------------|
| Tread size deployed | 260mm x 610mm |
| Tread deployment movement | 205mm |
| Minimum projection of case below sill height | 68mm |
| Case depth behind sill lip | 350mm* |
| Closed tread projection out from sill lip | 55mm* |
| Overall width of case | 690mm |

*Can be varied – depending on mounting brackets used

Weight: 16kgs

Standard Equipment: Extruded Anodised Aluminium ribbed tread profile
High grip Yellow and Black Rubber Strip to tread top edge
Soft Rubber Cushion Strip to leading edge of tread
Extruded Anodised Aluminium Side arms
Rubber Weather Flap to underside of Tread
High visibility corner mouldings
Galvanised Steel Case
Stainless Steel Rails
Nylon Rollers
12V Stayco geared single arm motor unit

Options: Wiring Kit consisting of:
Dash loom, body loom, control box, dash switch and warning light.
24v Motor
Vehicle Mounting Kit
Corner Tread Flashing Lights
Under Tread Lights

Warranty: 12 months on site

Complies with all current legislative requirements. CE marked.

The Company has a policy of continual improvement and reserves the right to change the product specifications without notice